




CENTELLEN® R 3825 – gasket sheet with best gas tightness and great stress relaxation for temperatures up to 200°C.

Centellen® R 3825 consists of aramid fibers, inorganic fibers as well as mineral fillers for reinforcement bonded with NBR.

Centellen® R 3825 is a material with best gas tightness and great stress relaxation at a temperature range up to 200°C.

This gasket sheet was developed with applications in mind like waste water, heating industry as well as the engineering industry.

The material is suitable for hydrocarbons like oils or solvents, alcohols, glycols, aqueous solutions, water and steam.

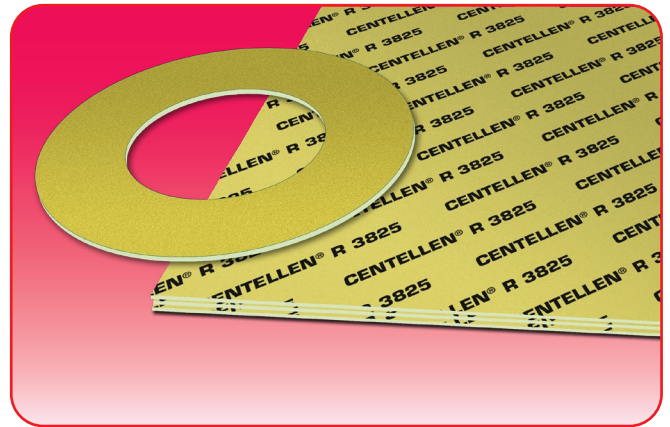

Manufactured by KLINGER

Basis composition Aramid fibers bonded with NBR.

Color Yellow / Yellow

Certificates in progress (BAM tested)

Sheet size 1000 x 1500 mm, 2000 x 1500 mm

Thickness 0.5 mm, 1.0 mm, 1.5 mm,
2.0 mm, 3.0 mm
Other thicknesses on request

Tolerances

Thickness according to DIN 28091-1

Length: ± 50 mm

Width ± 50 mm

Industry


General Industry / Chemical / Oil & Gas / Energy / Infrastructure / Pulp & Paper

TECHNICAL DATA - Typical values for a thickness of 2.0 mm

Density		g/cm ³	1.75
Compressibility	ASTM F 36 J	%	9
Recovery	ASTM F 36 J	%	55
Stress relaxation DIN 52913	50 MPa, 16 h/175°C	MPa	25
KLINGER cold/hot compression	thickness decrease at 23°C	%	13
50 MPa	thickness decrease at 300°C	%	28
Tightness	DIN 28090-2	mg/(s x m)	0.01
Thickness increase after fluid immersion ASTM F 146	oil IRM 903: 5 h/150°C	%	8
	fuel B: 5 h/23°C	%	10
Cold compression	DIN 28090-2	%	8
Cold recovery	DIN 28090-2	%	5
Hot compression	DIN 28090-2	%	27
Hot recovery	DIN 28090-2	%	4
Max. surface pressure EN 13555	23°C	N/mm ²	> 200
	175°C	N/mm ²	> 200

CENTELLEN® R 3825

P-T diagram

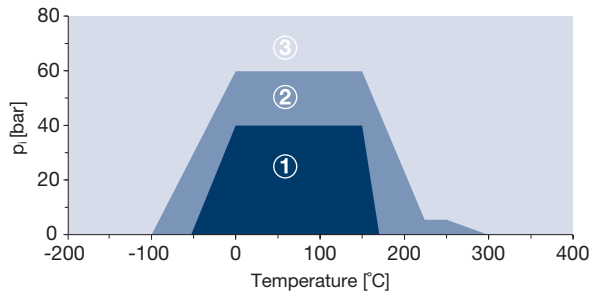


The area of the P-T diagram

- ① In area one, the gasket material is normally suitable subject to chemical compatibility.
- ② In area two, the gasket material may be suitable but a technical evaluation is recommended.
- ③ In area three, do not install the gasket without a technical evaluation.

Always refer to the chemical resistance of the gasket to the media.


Maximum surface pressure

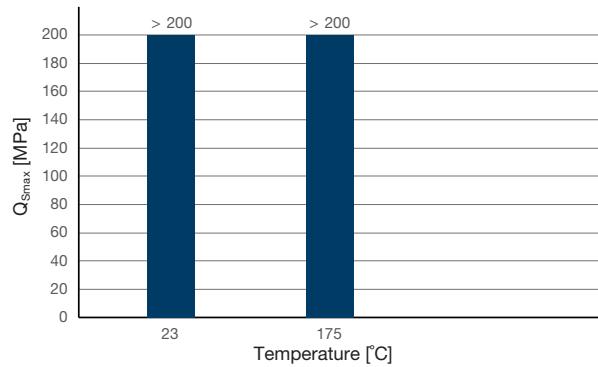

Maximum permissible surface pressure in operating conditions Q_{Smax} acc. to EN 13555

The maximum surface pressure in operating condition is the maximum permissible surface pressure the gasket can be loaded at the specified temperatures, without crucial plastic deformation and/or destruction of the gasket.

Tightness performance

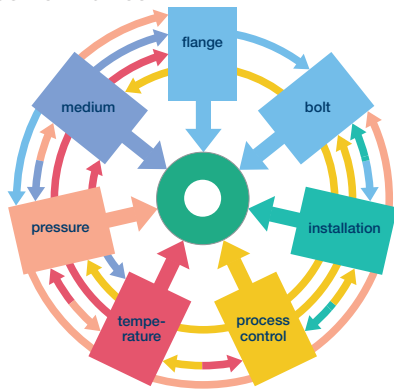

The many and varied demands on gaskets

The functionality and tightness of flange connections depends on a large number of parameters. Maximum temperature and pressure values alone can not define a material's suitability for an application. These limits are dependent upon a multiplicity of factors as shown in the picture on the left. A statement about the expected tightness of the flange connection is only possible if a qualified and defined installation of the gasket has been executed.

Chemical resistance chart

Simplified overview of the chemical resistance depending on the most important groups of raw materials:

CENTELLEN® R 3825						A: small or no attack	B: weak till moderate attack	C: strong attack			
Paraffinic hydrocarbon	Motor fuel	Aromates	Chlorinated hydrocarbon fluids	Motor oil	Mineral lubricants	Alcohol	Ketone	Ester	Water	Acid (diluted)	Base (diluted)
A	B	C	C	A	B	A	C	C	A	A	A

All information is based on years of experience in production and operation of sealing elements. However, in view of the wide variety of possible installation and operating conditions one cannot draw final conclusions in all application cases regarding the behaviour in gasket joint. The data may not, therefore, be used to support any warranty claims. This edition cancels all previous issues. Subject to change without notice.

